KYOCERA

usa.kyoceradocumentsolutions.com

For that moving target called business growth.

Keep building your business with the compact and versatile TASKalfa 508ci Series. Ideal for small to mid-size businesses, these dynamic multifunction printers grow with you as your needs evolve. You'll appreciate the intuitive 7" Color Touch Screen with tablet-like functionality that makes it easy to find features and interact with business apps. No matter what your needs are and how they change, these intelligent systems have the power to pivot as quickly as you do.



TASKalfa 508ci Series

- Up to 52 Pages per Minute
- Professional Finishing Options
- HyPAS-enabled for Solutions & Apps
- KYOCERA Net Manager

TASKalfa 508ci / 408ci
TASKalfa 358ci / 308ci

The TASKalfa 508ci / 408ci / 358ci / 308ci Options



DP-5130
Document Processor
(DSDP)



DP-5120
Document Processor
(DSDP)



DP-5100
Document Processor
(RADF)



DF-5100
300 Sheet Internal Finisher



DT-5100
Document Tray




RFID IC
Card Reader Holder



DF-5110 [1]
1,000 Sheet Finisher



NK-7100(B) / NK-7110(B)
Numeric Keypad



JS-5100
Job Separator



AK-5100
Attachment Kit



MT-5100 [1]
5 Bin Mailbox



DF-5120 [1]
3,200 Sheet Finisher



TASKalfa
508ci / 408ci / 358ci



TASKalfa 308ci



PF-5140 [2]
2,000 Sheet Tray



PF-5130 [2]
2 x 500 Sheet Tray



PF-5120
500 Sheet MPT

Stapler Option
SH-10 for DF-5100 / DF-5110 / DF-5120

Hole Punch Option
PH-5100 for the DF-5110

Only available for the TASKalfa 508ci / 408ci / 358ci models

Available on all TASKalfa 508ci / 408ci / 358ci / 308ci models

[1] Requires **AK-5100**

[2] Requires **PF-5120**

General Specifications

TASKalfa 508ci

Pages Per Minute: Color and Black – Letter: 52 ppm, Legal: 42 ppm,

Warm Up Time: 24 Seconds or Less (Power On)

First Page Out:
Copy: 5.3 Seconds or Less Black, 6.2 Seconds or Less Color
Print: 5.4 Seconds or Less Black, 6.4 Seconds or Less Color

Typical Electricity Consumption (TEC): 120V: 0.71 kWh/week; 220V: 0.67 kWh/week

Weight: 109 lbs (excludes Optional Document Processor)

Maximum Monthly Duty Cycle: 150,000 Pages per Month

Dimensions: 21.65" W x 21.65" D x 24.13" H

TASKalfa 358ci

Pages Per Minute: Color and Black – Letter: 37 ppm, Legal: 30 ppm,

Warm Up Time: 24 Seconds or Less (Power On)

First Page Out:
Copy: 5.9 Seconds or Less Black, 7.3 Seconds or Less Color
Print: 5.5 Seconds or Less Black, 6.5 Seconds or Less Color

Typical Electricity Consumption (TEC): 120V: 1.86 kWh/week; 220V: 1.66 kWh/week

Weight: 104.5 lbs (excludes Optional Document Processor)

Maximum Monthly Duty Cycle: 100,000 Pages per Month

Dimensions: 21.65" W x 19.96" D x 29.13" H

TASKalfa 408ci

Pages Per Minute: Color and Black – Letter: 42 ppm, Legal: 34 ppm,

Warm Up Time: 24 Seconds or Less (Power On)

First Page Out:
Copy: 5.8 Seconds or Less Black, 6.9 Seconds or Less Color
Print: 5.4 Seconds or Less Black, 6.4 Seconds or Less Color

Typical Electricity Consumption (TEC): 120V: 0.59 kWh/week; 220V: 0.55 kWh/week

Weight: 109 lbs (excludes Optional Document Processor)

Maximum Monthly Duty Cycle: 150,000 Pages per Month

Dimensions: 21.65" W x 21.65" D x 24.13" H

TASKalfa 308ci

Pages Per Minute: Color and Black – Letter: 32 ppm, Legal: 26 ppm,

Warm Up Time: 20 Seconds or Less (Power On)

First Page Out:
Copy: 6.4 Seconds or Less Black, 7.8 Seconds or Less Color
Print: 7.0 Seconds or Less Black, 8.0 Seconds or Less Color

Typical Electricity Consumption (TEC): 120V: 1.55 kWh/week; 220V: 1.43 kWh/week

Weight: 109.3 lbs (includes Standard RADF)

Maximum Monthly Duty Cycle: 100,000 Pages per Month

Dimensions: 21.65" W x 19.96" D x 29" H (includes RADF)

Specifications

Basic Specifications

Configuration: Color Multifunctional System – Print/Scan/Copy/Optional Fax

Duplex: Standard Stackless Duplex Supports Statement to Legal (5.5" x 8.5" – 8.5" x 14"), 16 lb Bond – 120 lb Index (60 – 220gsm)

Display:
New 7" 800 x 480 dot Color Touch Screen Control Panel[1]
7" Color Touch Screen Control Panel[2]

Resolution: 600 x 600 dpi; 1200 x 1200 dpi (At reduced speed)

Memory: 4GB Standard[1] / 1.5GB Standard (3GB Maximum)[2]

Hard Disk Drive: 320GB HDD Standard[1]
Optional 32GB (HD-6) or 128GB (HD-7) SSD[2]

Standard Output Tray:
Statement - Legal: 500 sheets; up to 8.5" x 48" Banner Single Sheet[1] / Statement - Legal 500 Sheets[2]

Electrical Requirements: 120V, 60Hz, 8.5A, 8.9A, 10.2A, 10.5A; 220-240V, 50Hz, 5.4A

Dimensions: 21.65" W x 19.96" D x 29.13" H (includes RADF)

Print Specifications

Standard Controller: Freescale QorIQ T1024 / 1.0GHz[1]
Main: SoC (PPC465S) 1GHz[2]

PDLs / Emulations: PRESCRIBE, PCL6 (PCL-XL / PCL5c), KPDL3 (PS3), XPS, OPEN XPS

Optional (UG-34): IBM ProPrinter, Line Printer, LQ-850

Print Resolution: Up to 1200 x 1200 dpi (At reduced speed)

Interfaces: Standard: 10/100/1000BaseTX, Hi-Speed USB 2.0, 3 USB Host Interfaces (2 USB Host Interfaces for the 308ci), 2 Expansion Slots

Scan Specifications

Scan Speeds (mono/color) A4,LTR @ 300 dpi:

DP-5100[3]: Simplex: 60, 62 ipm BW / 60, 62 ipm Color; Duplex: 26, 27 ipm BW / 26, 27 ipm Color
DP-5120[1]: Simplex: 60, 62 ipm BW / 60, 62 ipm Color; Duplex: 120, 124 ipm BW / 120, 124 ipm Color
DP-5130[1]: Simplex: 85, 87 ipm BW / 65, 67 ipm Color; Duplex: 170, 174 ipm BW / 130, 134 ipm Color

Copy Specifications

Job Management: 1,000 Department Codes[1] / 100 Department Codes[2]

Optional Document Processors[7]

Type / Capacity:
DP-5100[3]: Reversing Automatic Document Processor / 75 Sheets
DP-5120[1]: Dual Scan Document Processor / 100 Sheets
DP-5130[1]: Dual Scan Document Processor / 270 Sheets

Acceptable Originals:
5.5" x 8.5" – 8.5" x 74.8" (1900mm)[1]
5.5" x 8.5" – 8.5" x 36" (915mm)[2]

Acceptable Weights:
DP-5100[3]:
Simplex: 13 – 32 lb Bond (50 – 120gsm);
Duplex: 13 – 32 lb Bond (50 – 120gsm)
DP-5120[1]:
Simplex: 13 – 32 lb Bond (50 – 120gsm);
Duplex: 13 – 32 lb Bond (50 – 120gsm)
DP-5130[1]:
Simplex: 13 – 32 lb Bond (50 – 120gsm);
Duplex: 13 – 32 lb Bond (50 – 120gsm)

Optional Fax Processors

Fax Type: Fax System 10(X)[1] / Fax System 11[2]
Fax Memory: Standard 170 MB (No scalability: Maximum 170 MB)[1] / 3.5 MB[2]

Optional 1,000 Sheet Finisher DF-5110[1, 5, 6]

Stack / Staple Capacity:

Main Tray: 1,000 Sheets (up to 80gsm) / 50 Sheets (up to 24 lb Bond [90gsm])

Paper Size: 5.5" x 8.5" – 8.5" x 14"

Paper Weight: 16 lb Bond – 120 lb Index (60 – 220gsm)

Edge Staple Position: 3 Positions: Top Left, Bottom Left, Center Bind

Optional Punch: PH-5100 2 and 3 Hole Punch Unit, Supports 5.5" x 8.5" – 8.5" x 14"; 16 lb Bond – 120 lb Index (60 – 220gsm)

Dimensions: 23.27" W x 20.35" D x 39.58" H

Optional 3,200 Sheet Finisher DF-5120[1,5,6]

Stack / Staple Capacity: Main Tray (A): 3,000 Sheets; Sub Tray (B): 200 Sheets / 50 Sheets

Paper Size: 5.5" x 8.5" – 8.5" x 14"

Paper Weight: 16 lb Bond – 120 lb Index (60 – 220gsm)

Edge Staple Position: 3 Positions: Top Left, Bottom Left, Center Bind

Standard Punch: PH-5100 2 and 3 Hole Punch Unit, Supports 5.5" x 8.5" – 8.5" x 14"; 16 lb Bond – 120 lb Index (60 – 220gsm)


Dimensions: 25.59" W x 20.94" D x 42.35" H

Additional Options

Common for 508ci / 408ci / 358ci / 308ci:
Job Separator3 (JS-5100), Job Separator2 (JS-5100), Scan Extension Kit (A) for Searchable PDF/OCR, Bridge Unit Attachment Kit (AK-5100), ThinPrint (UG-33), Document Tray (DT-5100), Card Authentication Kit (B), 5 Bin Mailbox (MT-5100), Card Reader Holder (11), Wireless Card IB-50, Wireless Card IB-51

Only available for 508ci/408ci/358ci
Internet Fax Kit (A), Emulation (UG-34), Key Counter, Key Counter Attachment Kit

Only available for 308ci:
SD Card4 (16 or 32GB), Scan Extension Kit, Wireless Card IB-35, Standard Data Security Kit - (HD-6 or HD-7 is required)

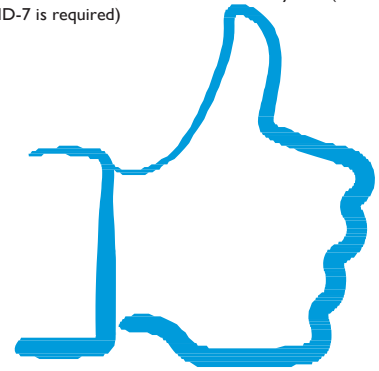

The TASKalfa 508ci Series are compact, highly scalable, multifunction systems that streamline your document processing. A host of intelligent features boost productivity, from robust paper handling and advanced finishing to a standard security kit.

Additional Specifications

Security Specifications

Standard: Local Authentication, Network Authentication, IPsec, SNMPv3, IEEE802.1x, IPP over SSL/TLS, HTTPS, FTP over SSL/TLS, SMTP over SSL/TLS, POP3 over SSL/TLS, Enhanced WSD over SSL/TLS, LDAP over SSL/TLS

Data Security Function: HDD Overwrite Mode, HDD Data Encryption

Print Specifications

Fonts: 136 KPDL3, 93 PCL6, 8 Windows Vista, 1 Bitmap

OS Compatibility: Windows: 7/8/8.1/10/Server 2008/ Server 2008 R2/Server 2012/Server 2012 R2/Server 2016/ Server 2019

Mac: OS Compatibility: Mac OS 10.9 and later, AirPrint Enabled

Mobile Printing: Apple AirPrint®, Google Cloud Print™, Mopria®, KYOCERA Mobile Print
Optional: 10/100/1000BaseTX (IB-50 for Dual NIC);
Optional: IEEE 802.11 b/g/n (IB-51 for Wireless LAN Interface)
IEEE 802.11 b/g/n (IB-35 for Wireless LAN Interface)[2] Comes standard with IB-35 [1]

Network Print and Supported Protocols: TCP/IP, IPv4, IPv6; HTTP, LPD, FTP, IPP, RawPort, LLTD, SNTP, DHCP, SMTP, POP3, DNS, SNMPv1/v2, WSD Scan/Print

Drivers: KX Driver, PCL Mini Driver, KPDL Mini Driver, KX Driver for XPS, Network Fax Driver, TWAIN Driver, WIA Driver, PPD for MAC, PPD for Linux

Utilities: KYOCERA Net Manager, KYOCERA Net Viewer, KYOCERA Capture Manager, Command Center RX

Paper Supply

Standard Paper Sources: Single 500 Sheet Tray, 100 Sheet MPT

Optional Paper Sources:
500 Sheet Tray (**PF-5120**), Dual 500 Sheet Trays (**PF-5130**)[4];
2,000 Sheet Large Capacity Tray (**PF-5140**)[4]

Paper Capacity: Standard: 600 Sheets;
Maximum: 3,100 Sheets

Paper Size:
Tray 1 – PF-5120 and PF-5130: 5.5" x 8.5" – 8.5" x 14" (Statement to Legal); PF-5140: 8.5" x 11" (Multiple Sheets)
MPT: 5.5" x 8.5" – 8.5" x 14" (up to 1220mm/ up to 48inch Single Sheet[1] / up to 356mm Multiple Sheets[2])

Paper Weight: Trays/MPT: 16 lb Bond – 120 lb index (60 – 220gsm)

Input Materials: Standard/Optional Drawer: Plain Paper, Bond Paper, Recycled Paper, Envelopes; MPT: Plain Paper, Bond Paper, Recycled Paper, Cardstock, Transparencies, Labels, Envelopes

Scan Specifications

File Formats: TIFF (MMR compression), PDF (MMR compression), PDF (high compression), OpenXPS, XPS, JPEG

PDF Extension: Searchable PDF (OCR) Option

Connectivity / Supported Protocols:
10/100/1000BaseTX, TCP/IP, Hi-Speed USB 2.0

Scanning Functions: Scan to Folder (SMB), Scan to e-Mail, Scan to FTP, Scan to FTP over SSL, Scan to USB, WSD Scan, TWAIN Scan

Original Size: Through DP: Statement to Banner (5.5" x 8.5" – 8.5" x 72 inch)

Glass: Statement to Legal (5.5" x 8.5" – 8.5" x 14 inch)

Copy Specifications

Copy Resolution: 600 x 600 dpi

Image Mode: Text, Photo, Text/Photo, Graphic/Map

Continuous Copy: 1 – 9999[1], 1 – 999[2] / Auto Reset to 1

Additional Features: Auto Magnification, Auto Paper Select, Auto Start, Auto Drawer Change, Interrupt Copy

Magnification / Zoom: Full Size, 5 Reduction[1], 7 Reduction[2], 5 Enlargement Preset Ratios, 25-400% in 1% step increments
Document Box: Custom Box, Job Box, Removable Memory Box, Fax Box (with optional Fax System)

Optional Fax Specifications

Compatibility / Data Compression:
Super G3 Fax / MMR, MR, MH, JBIG

Transmission Speed / Modem Speed:
Less than 3 seconds / 33.6 Kbps

Driver: Network Fax Driver

Fax Functions: Network fax, duplex transmission and reception, encrypted transmission and reception, polling transmission and reception, broadcast

Output & Finishing Options

Optional 300 Sheet Internal Finisher DF-5100[5]

Stack / Staple Capacity:
300 Sheets / 50 Sheets (up to 21 lb Bond [80gsm])

Paper Size: 5.5" x 8.5" – 8.5" x 14"

Paper Weight: 16 lb Bond – 120 lb Index (60 – 220gsm)

Edge Staple Position: 3 Positions: Front 1 staple, Edge 1 staple, Face 2 staple

Dimensions: 19.13" W x 15.55" D x 6.22" H

CBS
CENTRAL BUSINESS SYSTEMS

[1] Only available for the TASKalfa 508ci / 408ci /358ci model
[2] Only available for the TASKalfa 308ci model
[3] Comes standard on the TASKalfa 308ci model
[4] Requires PF-5120
[5] Only 1 output option can be installed
[6] Requires Bridge Unit Attachment Kit (AK-5100)
[7] Only 1 Document Processor can be installed

Specifications and design are subject to change without notice. For the latest on connectivity visit usa.kyoceradocumentsolutions.com. TASKalfa, KYOCERA Net Manager, and Command Center RX are trademarks of the Kyocera Companies. AirPrint is a trademark of Apple, Inc. Google Cloud Print is a trademark of Google, Inc. Mopria is a trademark of Mopria Alliance, Inc. All other trademarks are the property of their respective owners.

KYOCERA Document Solutions America, Inc.
Headquarters: 225 Sand Road, Fairfield, NJ 07004-0008, USA
©2020 KYOCERA Document Solutions America, Inc.
v012420